PHASE	QTY.
1	2
GRID LOCATION	
C/4	2/B
C/4	5/A

ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION | ISSUED FOR INFORMATION ONLY

SUB-ASSEMBLY REF.	
No.	In Assembly.
2	ALONE

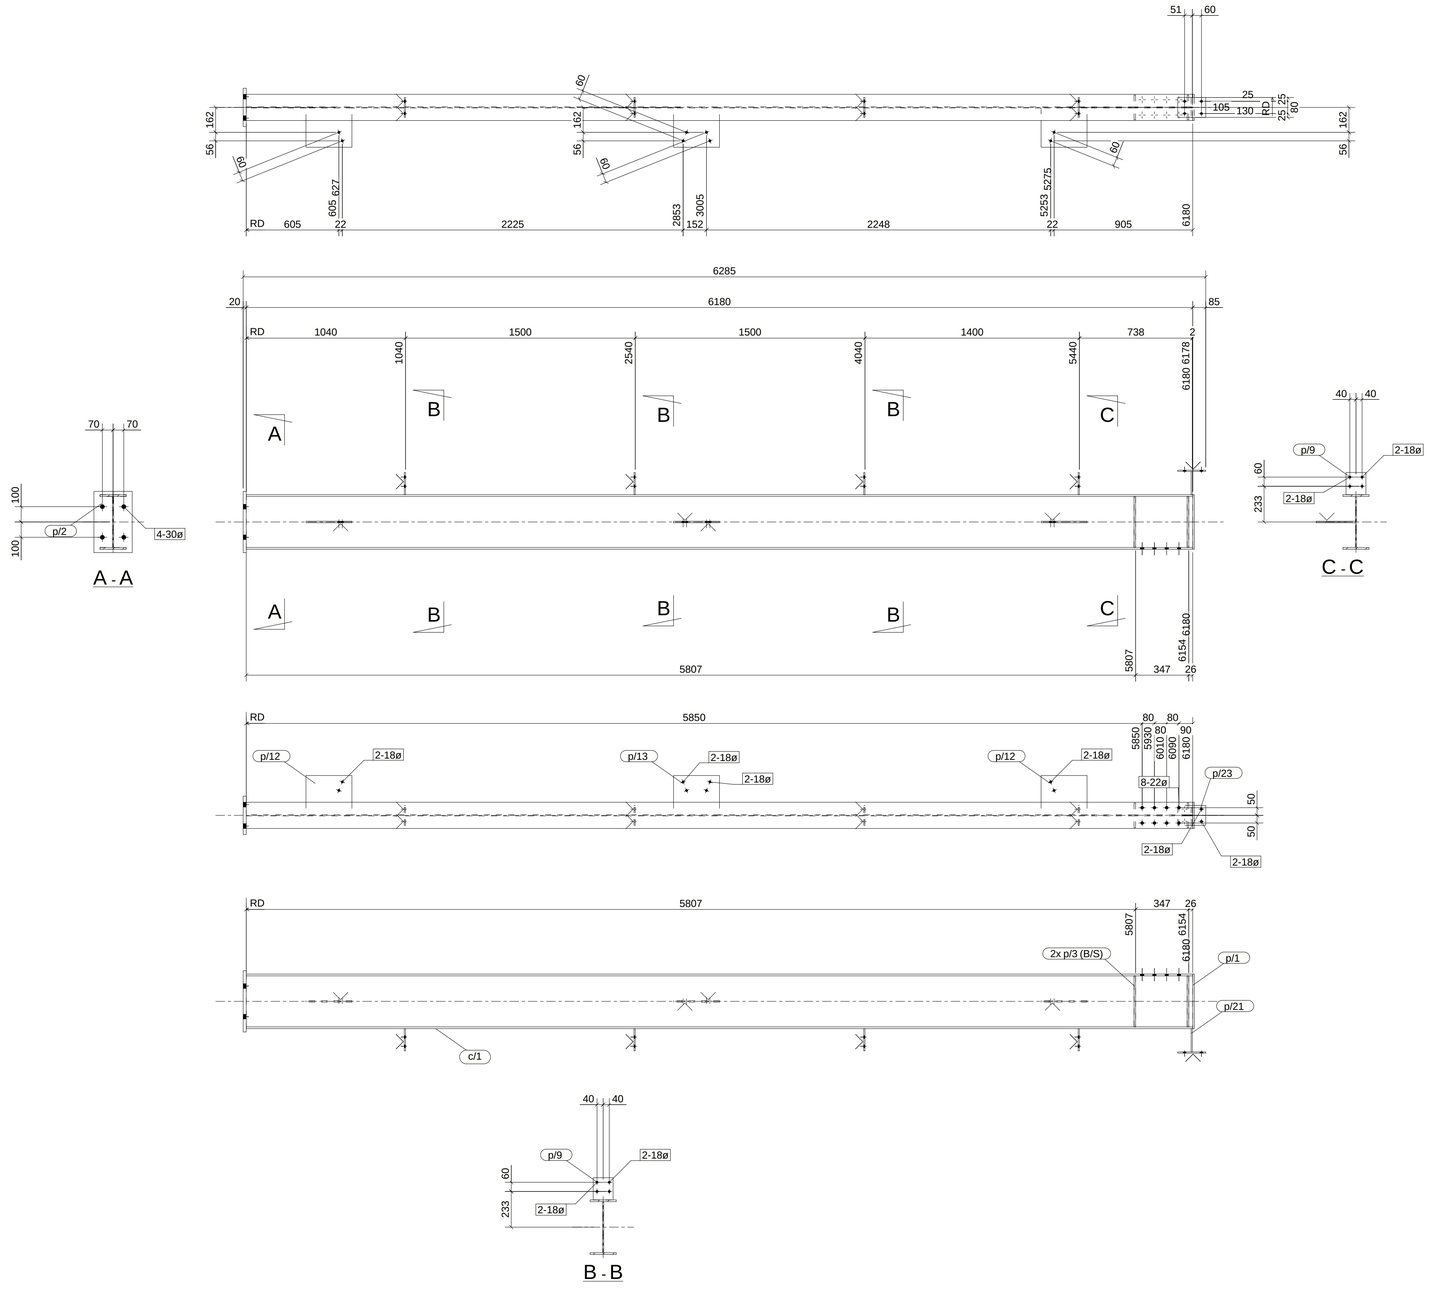

MATERIAL LIST

ITEM	No.OFF	SECTION	LENGTH	GRADE	WEIGHT(kg)	AREA(m^2)
c/1	1	UB360*51	6180	300PLUS	313.3	8.405
p/1	1	PL10*171	356	250	4.8	0.132
p/2	1	PL20*250	400	250	15.7	0.226
p/3	4	PL10*76.8	333	250	8.0	0.238
p/9	4	FL8*130	145	250	4.7	0.168
p/12	2	FL10*300	256	250	12.1	0.330
p/13	1	FL10*300	256	250	6.0	0.165
p/21	1	FL8*130	152	250	1.2	0.044
p/23	1	FL8*130	183	250	1.5	0.053
				TOTAL:	367.4	9.8

2 COLUMN[S] REQUIRED MK C/4

Notes:
ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION.
SIZES BY EOR. AS 4100 & AS/NZS 5131, CC2 TBC.
HOT-ROLLED 300PLUS, PLATE GR 250, LYSAGHT G450.
HOLES D+2 U.N.O.; HD M24: 30 DIA, HD M20: 26 DIA.
BOLTS M20 8.8/TB, M16 8.8/S, M12 4.6/S (55 Nm).
WELDS 6 CONTINUOUS FILLET U.N.O., GP (AS/NZS 1554.1).
PAINT SYSTEM BY EOR (TBC). DO NOT SCALE.

Rev	By	Date	Description

SAMPLE SHED 18x30
SAMPLE SITE, QLD

STRUCTOMAT

COLUMN

Drawn By: STRUCTOMAT
Checked By:
Approved By:

Scale:	Project No:	Assembly No:	Qty:	Size:	Sheet No:	Rev:
1:20	AU-01	C/4	**2**	**A1**	N/A	