


ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION | ISSUED FOR INFORMATION ONLY

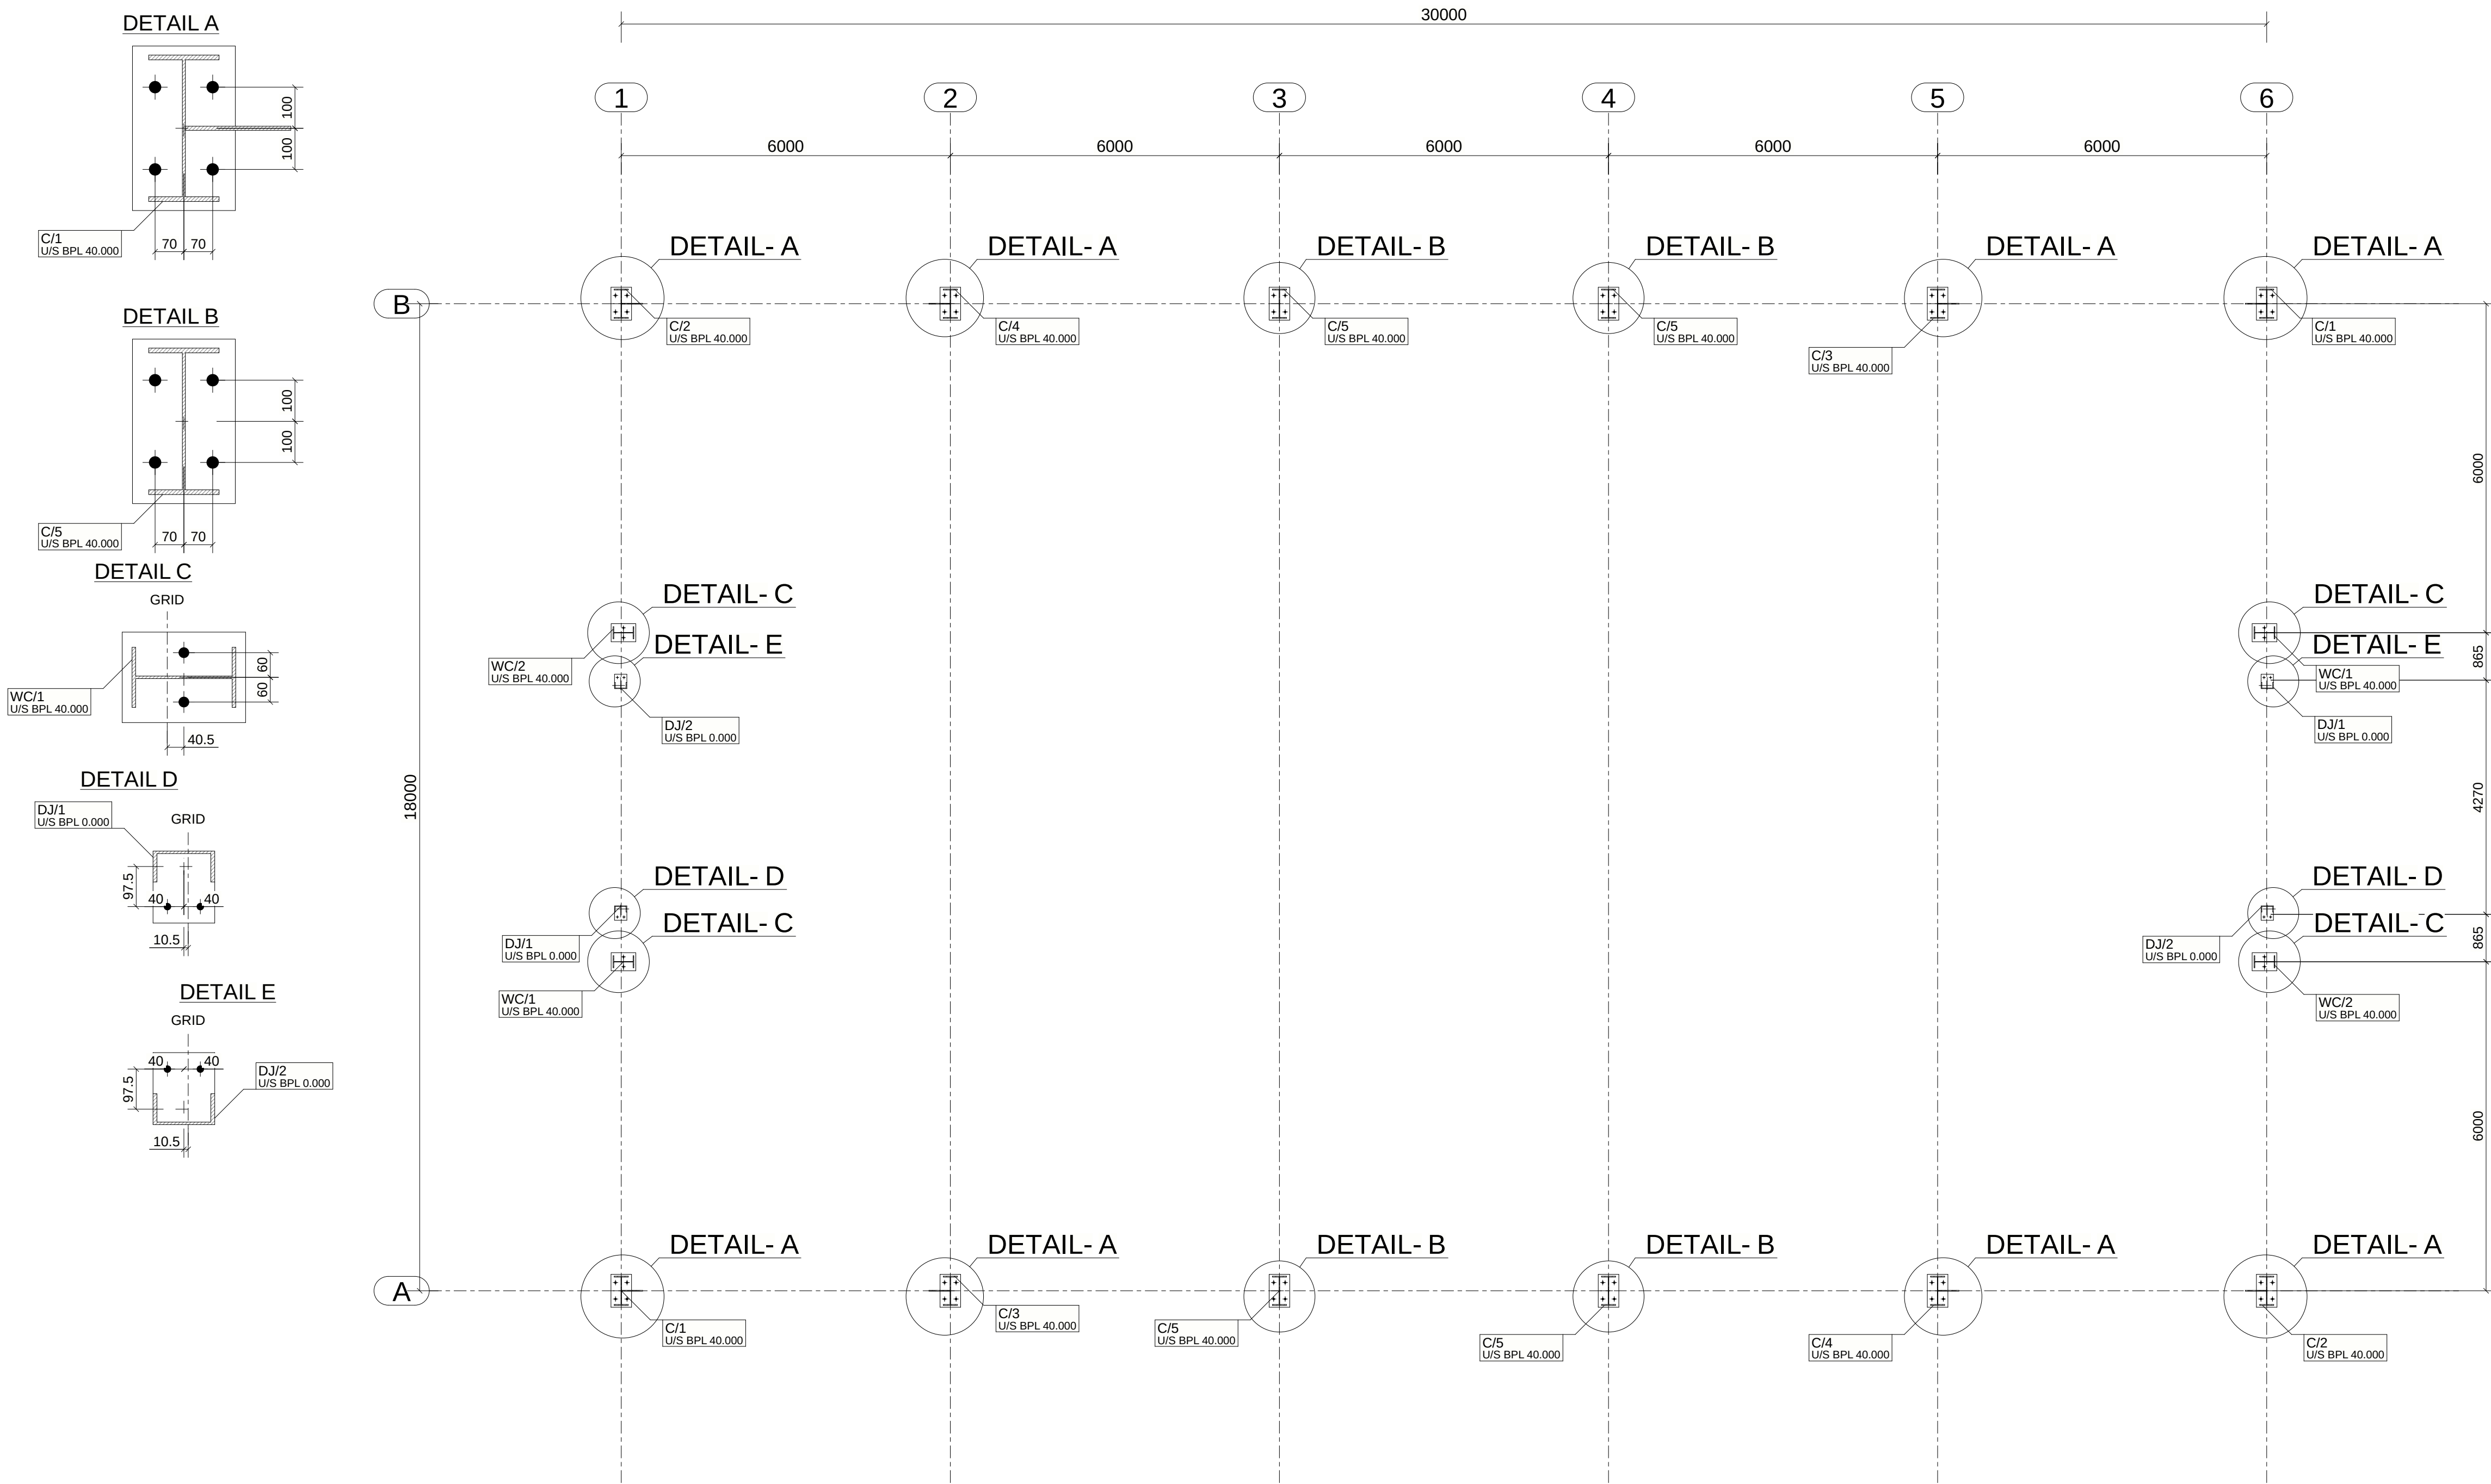

DETAIL C - GRID 1 SHOWN.
GRID 6: MIRRORED ABOUT GRID.
WC/1 & WC/2: C/L 40.5 INSIDE GRID.

DETAIL D - GRID 1 (DJ/1) SHOWN.
GRID 6 (DJ/2): MIRRORED.
JAMB C/L 10.5 OUTSIDE GRID.

DETAIL E - GRID 1 (DJ/2) SHOWN.
GRID 6 (DJ/1): MIRRORED.
JAMB C/L 10.5 OUTSIDE GRID.

HOLDING DOWN BOLTS / ANCHORS (ILLUSTRATIVE - SIZES BY EOR)
HD/1 at C/1-C/5: 4 x M24 ROD GR 4.6 x 702 LG, EMBED 600, PL8 70x70 PLATE WASHER (26 DIA)
HD/2 at WC/1-WC/2: 2 x M20 ROD GR 4.6 x 593 LG, EMBED 500, PL6 56x56 PLATE WASHER (22 DIA)
EACH HD BOLT: LEVELLING NUT UNDER BASE PLATE + NUT ON PLATE WASHER.
GROUT 40 UNDER C & WC BASE PLATES: 'U/S BPL 40.000' = UNDERSIDE OF BASE PLATE 40 mm ABOVE T.O.CONC.
DJ/1-DJ/2: 2 x M16 POST-INSTALLED ANCHOR PER BASE (18 DIA HOLES) - TYPE & EMBED BY EOR - HOLD. NO GROUT.

Notes:
ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION.
ERECT TO AS/NZS 5131. SURVEY HD BOLTS FIRST.
FRAMES TEMPORARILY BRACED UNTIL BRACING COMPLETE.
TENSION TB BOLTS & GROUT AFTER PLUMB & LINE.
HD BOLTS / ANCHORS: SEE TABLE ON E1.
BRIDGING BG: 1 ROW MID-BAY, FIT BEFORE SHEETING.
DOOR & GUTTER FOR REF ONLY - CONFIRM W/ SUPPLIER.

Rev	By	Date	Description	SAMPLE SHED 18x30 SAMPLE SITE, QLD		STRUCTOMAT	
				HOLDING DOWN BOLT PLAN		Drawn By:	STRUCTOMAT
						Checked By:	
						Approved By:	
				Scale:	Project No:	Drawing No:	Size: Rev
				1:75	AU-01	E1	A1