PHASE	QTY.
1	2
GRID LOCATION	
R/3	2/A-B
R/3	5/A-B

ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION | ISSUED FOR INFORMATION ONLY

SUB-ASSEMBLY REF.	
No.	In Assembly.
2	ALONE

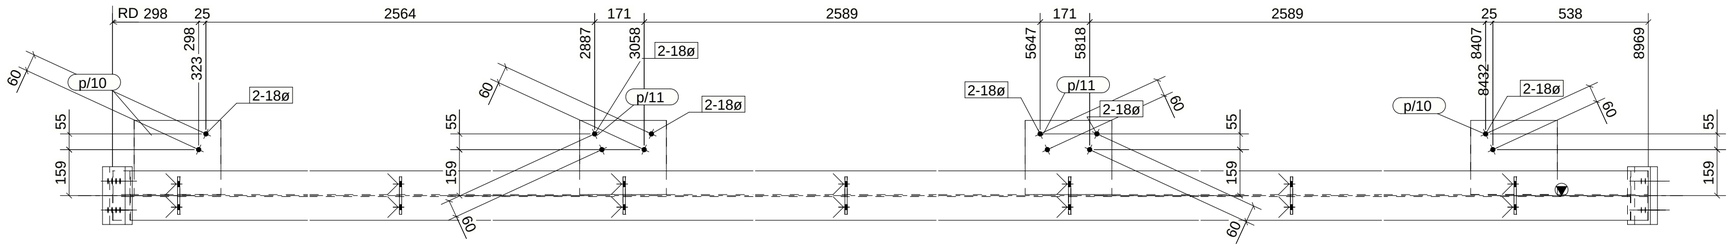

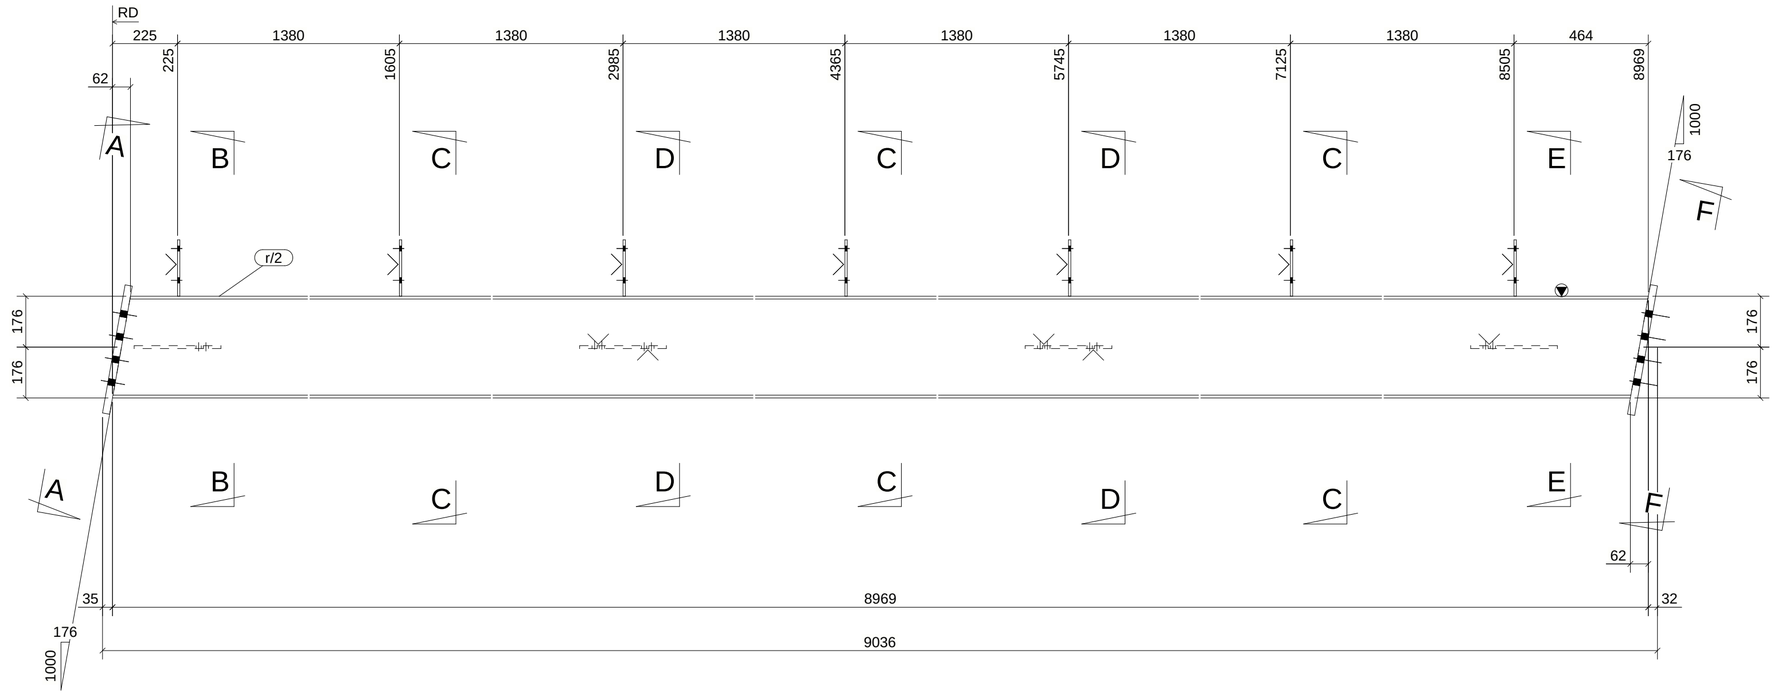

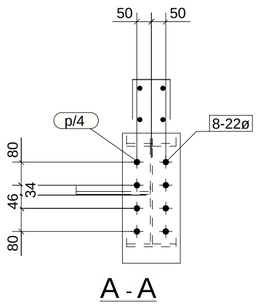

A - A

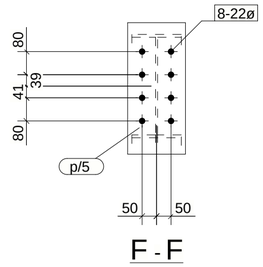

F - F

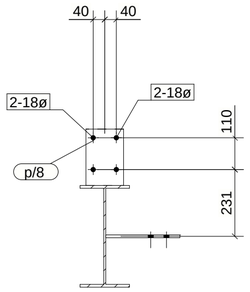

B - B

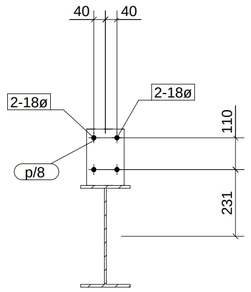

C - C

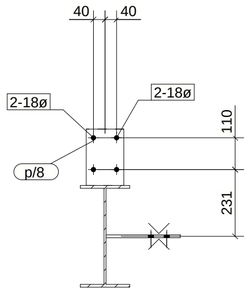

D - D

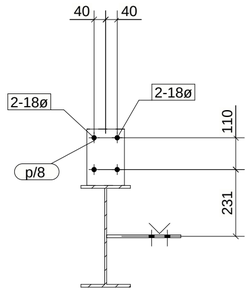

E - E

2 RAFTER[S] REQUIRED MK R/3

MATERIAL LIST

ITEM	No.OFF	SECTION	LENGTH	GRADE	WEIGHT(kg)	AREA(m²)
p/4	1	FL25*200	450	250	17.7	0.213
p/5	1	FL25*200	455	250	17.9	0.215
p/8	7	FL8*130	195	250	11.1	0.391
p/10	2	FL10*300	256	250	12.1	0.330
p/11	2	FL10*300	256	250	12.1	0.330
r/2	1	UB360*45	8969	300PLUS	400.9	12.109
				TOTAL:	471.7	13.6

Notes:
ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION.
SIZES BY EOR. AS 4100 & AS/NZS 5131, CC2 TBC.
HOT-ROLLED 300PLUS, PLATE GR 250, LYSAGHT G450.
HOLES D+2 U.N.O.; HD M24: 30 DIA, HD M20: 26 DIA.
BOLTS M20 8.8/TB, M16 8.8/S, M12 4.6/S (55 Nm).
WELDS 6 CONTINUOUS FILLET U.N.O., GP (AS/NZS 1554.1).
PAINT SYSTEM BY EOR (TBC). DO NOT SCALE.

Rev	By	Date	Description

SAMPLE SHED 18x30
SAMPLE SITE, QLD

STRUCTOMAT

RAFTER

Drawn By:	STRUCTOMAT
Checked By:	
Approved By:	

Scale:	Project No:	Assembly No:	Qty:	Size:	Sheet No:	Rev:
1:15	AU-01	R/3	**2**	**A2**	N/A	