PHASE	QTY.
1	4
GRID LOCATION	
R/5	3/A-B
R/5	4/A-B

ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION | ISSUED FOR INFORMATION ONLY

SUB-ASSEMBLY REF.	
No.	In Assembly.
4	ALONE

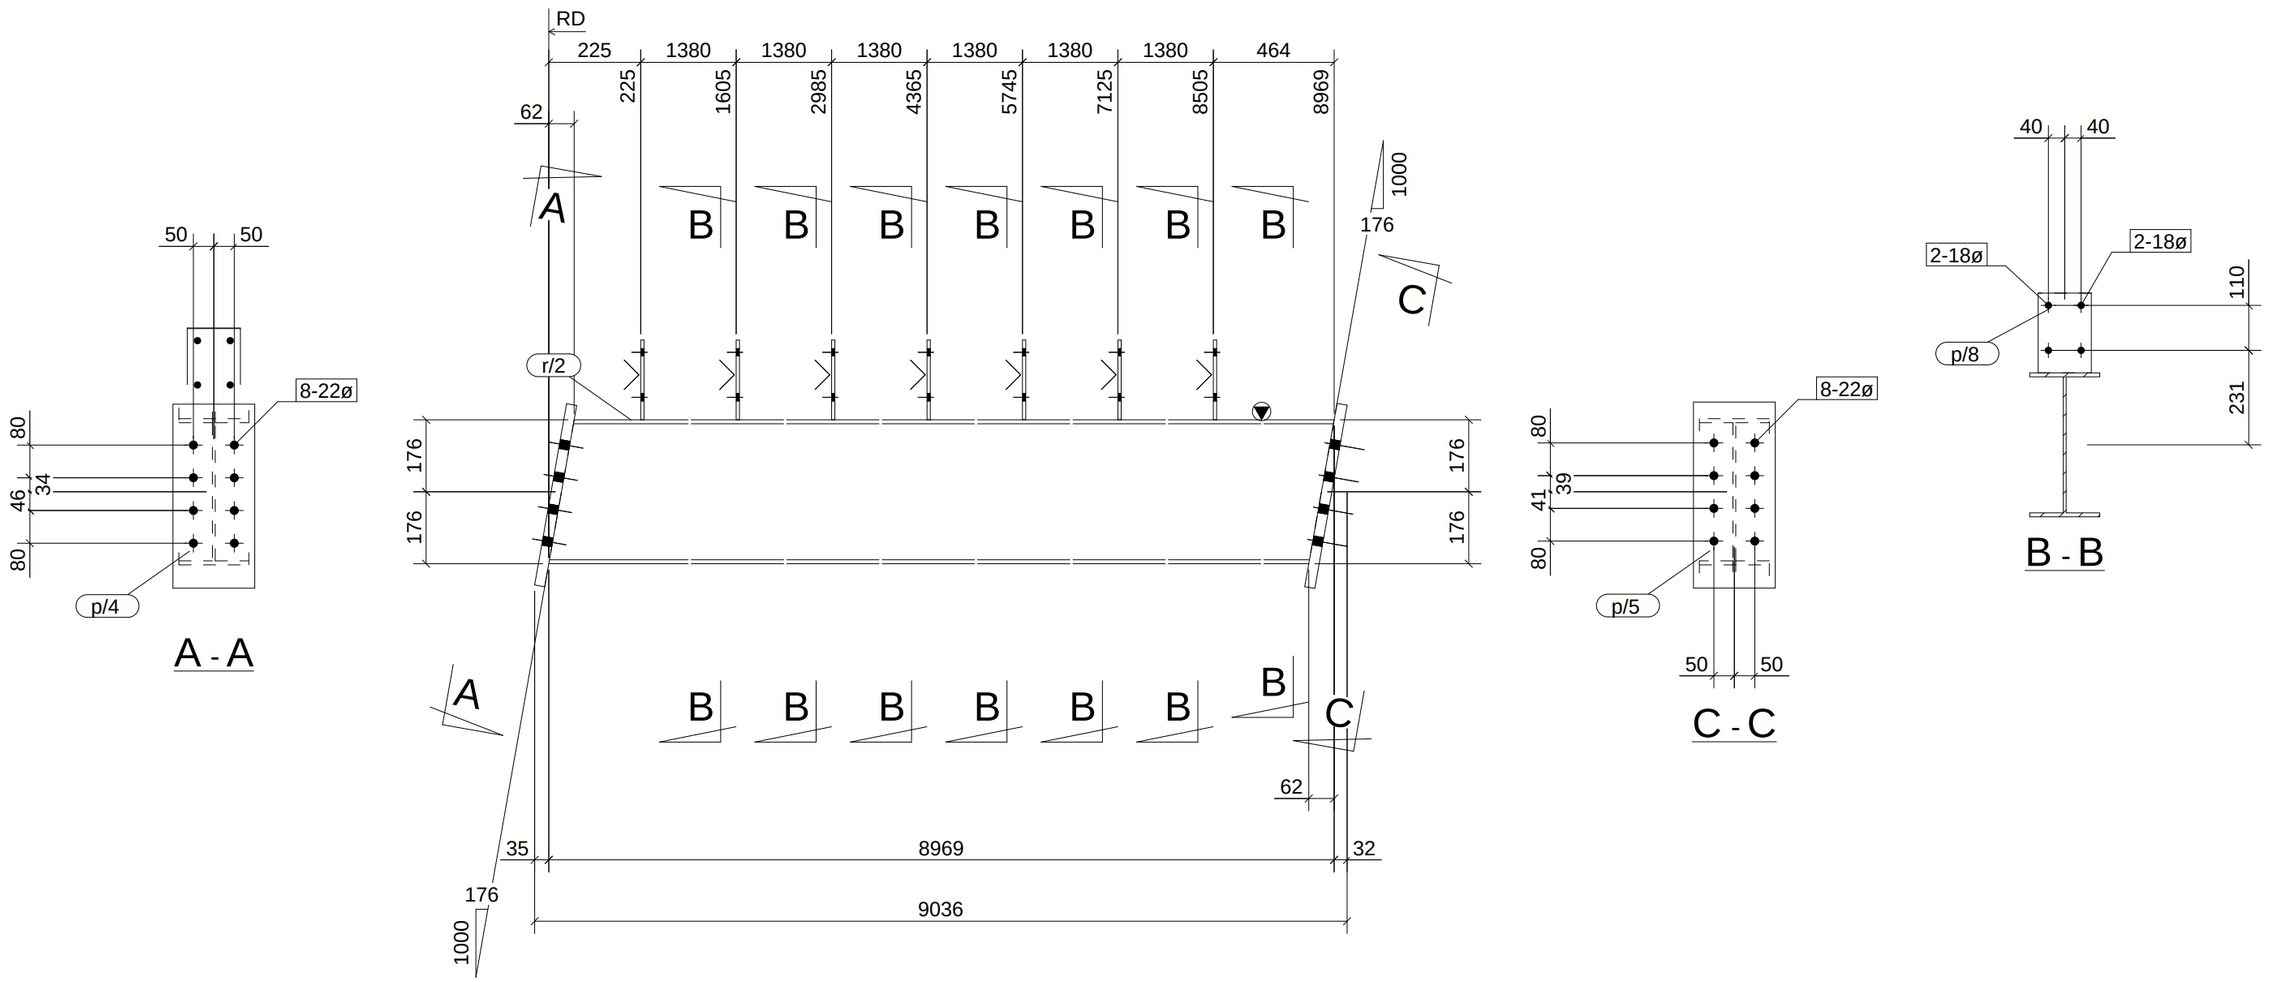

4 RAFTER[S] REQUIRED MK R/5

MATERIAL LIST						
ITEM	No.OFF	SECTION	LENGTH	GRADE	WEIGHT(kg)	AREA(m^2)
p/4	1	FL25*200	450	250	17.7	0.213
p/5	1	FL25*200	455	250	17.9	0.215
p/8	7	FL8*130	195	250	11.1	0.391
r/2	1	UB360*45	8969	300PLUS	400.9	12.109
				TOTAL:	447.6	12.9

Notes:
ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION.
SIZES BY EOR. AS 4100 & AS/NZS 5131, CC2 TBC.
HOT-ROLLED 300PLUS, PLATE GR 250, LYSAGHT G450.
HOLES D+2 U.N.O.; HD M24: 30 DIA, HD M20: 26 DIA.
BOLTS M20 8.8/TB, M16 8.8/S, M12 4.6/S (55 Nm).
WELDS 6 CONTINUOUS FILLET U.N.O., GP (AS/NZS 1554.1).
PAINT SYSTEM BY EOR (TBC). DO NOT SCALE.

Rev	By	Date	Description

SAMPLE SHED 18x30
SAMPLE SITE, QLD

STRUCTOMAT

RAFTER

Drawn By: STRUCTOMAT
Checked By:
Approved By:

Scale:	Project No:	Assembly No:	Qty:	Size:	Sheet No:	Rev:
1:15	AU-01	R/5	**4**	**A3**	N/A	