


PURLIN/GIRT DETAIL SHEET

NOTE: ALL HOLES 18 DIA FOR M12 BOLTS UNLESS NOTED.

MATERIAL LIST						
ITEM	No.OFF	SECTION	LENGTH	GRADE	WEIGHT(kg)	AREA(m ²)
ep/2	1	LYS-C20019	5990	G450	33.5	4.641
TOTAL:					33.5	4.6

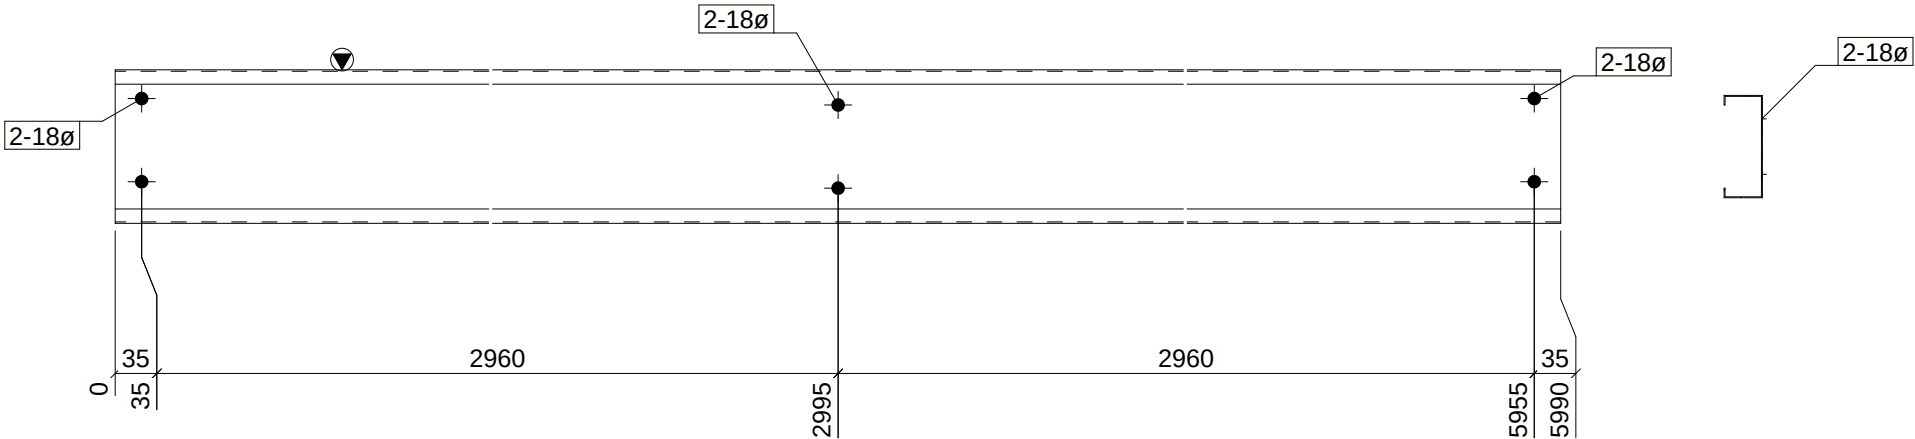

6 EAVE PURLIN[S] REQUIRED MK EP/3

Notes:
ILLUSTRATIVE SAMPLE - NOT FOR CONSTRUCTION.
SIZES BY EOR. AS 4100 & AS/NZS 5131, CC2 TBC.
HOT-ROLLED 300PLUS, PLATE GR 250, LYSAGHT G450.
HOLES D+2 U.N.O.; HD M24: 30 DIA, HD M20: 26 DIA.
BOLTS M20 8.8/TB, M16 8.8/S, M12 4.6/S (55 Nm).
WELDS 6 CONTINUOUS FILLET U.N.O., GP (AS/NZS 1554.1).
PAINT SYSTEM BY EOR (TBC). DO NOT SCALE.

Rev	By	Date	Description

SAMPLE SHED 18x30			STRUCTOMAT	
SAMPLE SITE, QLD				
EAVE PURLIN			Drawn By:	STRUCTOMAT
			Checked By:	
			Approved By:	
Scale:	Project No:	Assembly No:	Qty:	Size:
1:15	AU-01	EP/3	6	A4
			Sheet No:	Rev:
			N/A	